
PARTHOS

Technical information



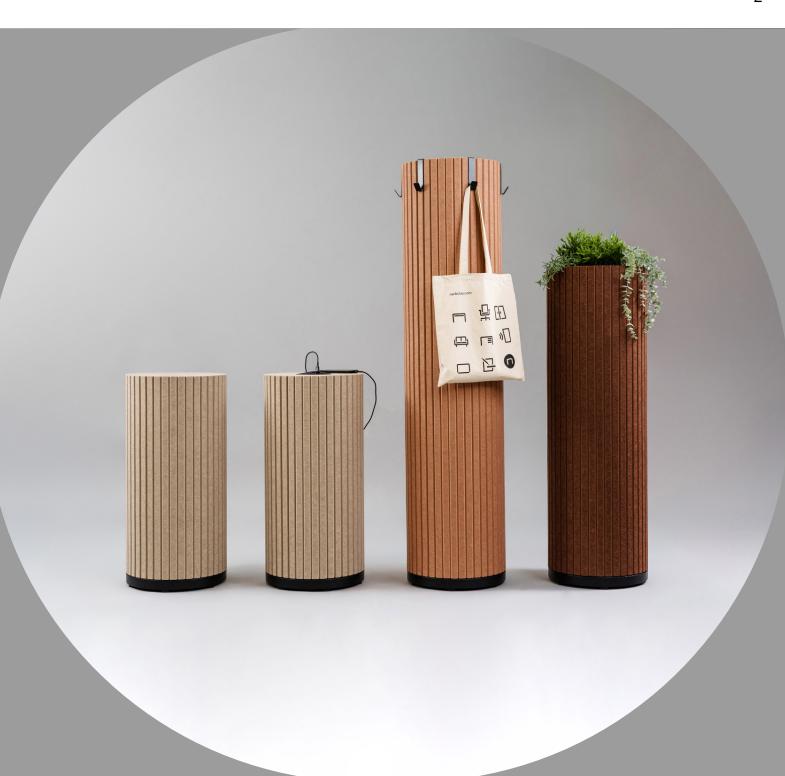

Quality standard

EN 1023-2 (section 4.2) ISO 20189 ISO 354

10 year Warranty

See Warranty statement



Technical information

Types

- Acoustic column (1)
- Acoustic column with space for plant pot (2)
- \cdot Acoustic column with hooks (3)
- Acoustic column with power socket (4)



Surface cover

• Cover made of PET fiber board 9 mm, with vertical pattern;

• The top cover is made of PET fiber board 9 mm.

Internal structure

• Welded metal frame made of 20x20 mm metal tube and 2 mm metal sheet;

- · Powder-coated metal;
- · Concrete counterweight.

Base

- 36 mm MFC (melamine) with 2 mm ABS edging;
- Adjustable height levelling feet, H=9 14 mm, 6 pcs.

Acoustic fill

• Fabric off-cuts from the production are used as an acoustic filler;

• Composition of acoustic filler – mix of polyester and cotton.

Coat hanger hooks

- Hooks made of 1,5 mm metal sheet, 6 pcs;
- Powder coated metal;
- Dimensions 30x25x120 mm;
- Recommended maximum weight per hook 2 kg.

Cut-out for flower pot on the top panel

- Interior covered with PET fiber board;
- Cut-out diameter 230 mm;
- Cut-out depth 170 mm.

Power socket

- Power socket 100 230 V;
- Power socket standards: EU, FR, UK, CH, US;
- The hardwired power cord to GST18i3 800 mm;
- $\cdot~$ Power supply cable length: 2 m.

Available configurations for power sockets

- 3 x AC power sockets;
- 2 x AC power sockets, USB fast charger (USB Type A+C, 25W);


• 3 x AC power sockets, wireless charger (10W) (except US market);

- $\cdot \,\,$ 2 x AC power sockets, 1 x USB fast charger (USB Type
- A+C, 25W), wireless charger (10W) (except US market)


Range

Acoustic column (1)

Acoustic column with space for plant pot (2)









Ø380

Acoustic column with hooks (3)

Acoustic column with power socket (4)





* Product weight may vary due to use of fabric off-cuts as acoustic filling.

Additional information

• Careless activity with the product may cause the cylinder to fall and result in damages or injuries. Please refrain from conducting the following: leaning, sitting on the product, or rolling the product.

• The product is shipped fully assembled. Exception: hooks need to be attached on site if the configuration with hooks was ordered.

• Slight PET Felt color deviations can occur due to use of recycled material in the production of the product. Some undyed fibers may be present on the surface of the product.

• There may be slight variations in the weight and volume of the fabrics due to nature of acoustic fill.

• Some loose fabrics fibers or strings can be found on the surface of product after unpacking or after the product was moved around the office.

• Live plants should be placed inside plastic pot before placing them inside product.



 $\cdot\,$ The Recommended maximum weight per hook is 2 kg. Exceeding maximum recommended weight or concentrating heavy load on single side of the product may result in tipping of the product.

• Do not place any open containers with liquid on top of the product as liquid spill may cause damages to electrical components.

• Power socket with wireless function must be flipped to access wireless charger.

